


Cathode-ray tubes for oscilloscopes, radar display units, flying spot scanners


... with electrostatic deflection

Oscilloscope tubes


Type	Screen shape	Screen diameter or diagonal cm	Deflection coefficient		Total acceleration voltage V	Useful scan		Heater current mA	Overall length mm
			D ₃ D ₄ V/cm	D ₁ D ₂ V/cm		Direction D ₃ D ₄ mm	Direction D ₁ D ₂ mm		
D 3-11	○	3	58	51	500	27	27	300	103,2
D 3-111	○	3	58	51	500	27	27	92	103,2
D 6-100	□	6	45	40	1000	46 (X)	20 (Y)	300	137,5
D 7-16	○	7	21	43	800	60	65	92	162
DG 7-74 A	○	7	8	13,5	1000	65	68	300	305
D 7-210	○	7	11,5	29	1000	50	60	300	223
D 9-10	□	9	15	15	1000	70 (X)	40 (Y)	92	206,5
D 10-19	□	10	23	23	10000	56	68	92	217,5
D 10-191	□	10	8	8	3000	56	68	92	217,5
D 10-250	□	10	13	24	3000	56	68	92	217,5
D 10-260	○	10	13,7	30	1500	60	80	300	260
D 13-41	○	13	8,5	18,5	3000	80	100	300	349
D 13-43	○	13	15	15	6000	100	100	92	410
D 13-620	○	13	14,5	28	2000	80	100	300	304
D 13-621	○	13	12,5	22,5	2000	80	100	300	334,5
D 14-11	□	14	5	11	10000	60	100	92	350
D 14-111	□	14	4,5	9	12500	60	100	300	350
D 14-131	□	14	5,3	9	12500	80	100	300	350
D 14-140	□	14	11	20	16000	80	100	300	350
D 14-220	□	14	3,7	6,5	20000	80	100	300	380
D 14-230	□	14	9	19,5	3000	80	100	300	308
D 14-231	□	14	9	19,5	3000	80	100	92	308
D 18-11	○	18	16	27	6000	120	150	300	425
D 18-141	○	18	29	34	4000	160	160	300	354
D 18-150	□	18	3,8	7,6	18000	100	120	300	445

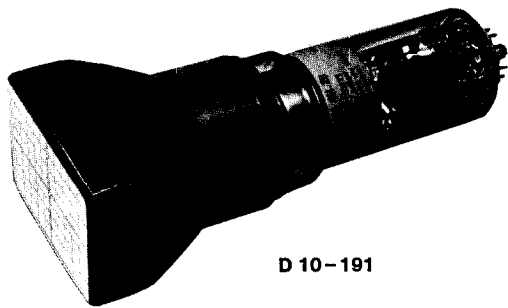

D 10-191

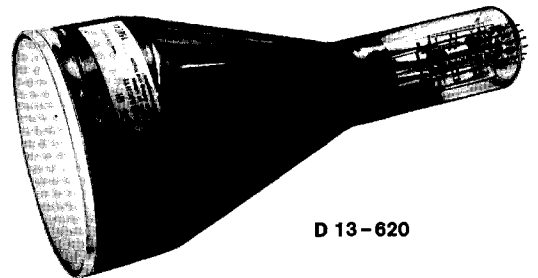

D 13-620

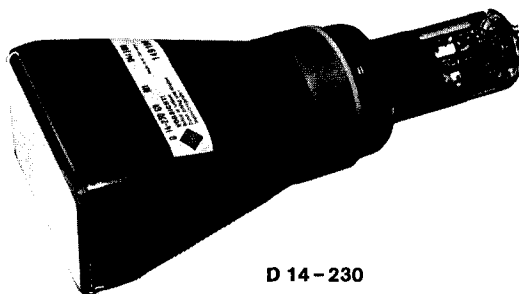

D 14-230